



ONE-STIRRUPED CHAINS series of quality 8

VB101



VB102




VB 103




VB 105




VB 111



VB112

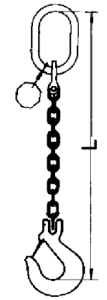

VB113




VB121




VB122




VB123

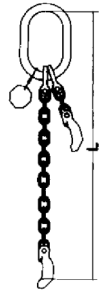


VB142




VB143





VB150



VB150



VB152

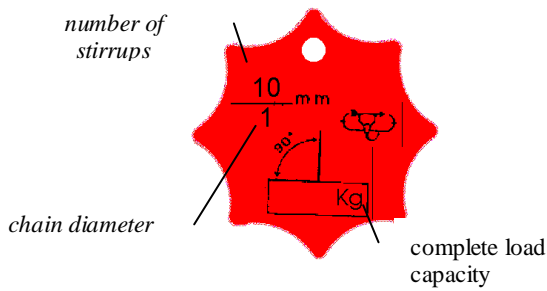

nominal diameter and load capacity for chains

d	kg			
6	1120	1120	850	1200
8	2000	2000	1600	2200
10	3150	3150	2500	3400
13	5300	5300	4200	5800
16	8000	8000	6300	9000
18	10000	10000	8000	11200

FACTORS OF REDUCED WORKING LOAD CAPACITY AS TO VALUES IN THE TABLE

unsymmetrical			
temperature	-40 ⁰ do +200 ⁰ C	+200 ⁰ do +300 ⁰ C	+300 ⁰ do +400 ⁰ C
	1	0,9	0,75