



LOADING HOOK




article number	chain diameter	A	B	C	D ₁	G	H	I	T	allowed load capacity	weight kg
8	9	40	24	10	33	31	23,5	108	2000	0,9	
10	11	49	26	12,5	39	36,5	28	118	3200	1,6	
13	15	64	33	16	49	46	35	160	5000	2,8	
16	18	76	41	19	62	58	44,5	198	8000	6	
18	20	88	47	22	69	65	49,5	224	10000	8,5	

SLING HOOK WITH LATCH




article number	nominal height	chain diameter	D ₁	D ₂	G	H	I	T	allowed load capacity	weight kg
19	5	5	12	7,5	18	17	13	64	800	0,15
21	6	6	16	10	24	22,5	17	85	1250	0,35
23	7	7	20	13,5	33	31	23,5	116	2000	0,8
23	8	8	20	13,5	33	31	23,5	116	2000	0,8
25	9	9	26	16	39	36,5	28	138	3200	1,6
25	10	10	26	16	39	36,5	28	138	3200	1,6
27	13	13	32	20	49	46	35	174	5000	2,6
29	16	16	40	25	62	58	44,5	219	8000	5,8
30	18	18	46	28	69	65	49,5	246	10000	8
31	20	20	52	31,5	78	73	56	277	12500	11,5
32	22	22	60	35,5	88	82,5	63	313	16000	16

CLIP




article number	chain diameter	A	B	C	C ₁	D ₁	D ₃	T	allowed load capacity	weight kg
6	7	30	16	8	7,2	19	33	1120	0,075	
8	9	40	24	11	10	24	45	2000	0,34	
10	11,5	49	26	13	12,5	27	49	3150	0,4	
13	15	64	33	17	16	32	60	5300	0,78	
16	18	76	41	20	19	40	74	8000	1,3	
18	20	88	47	22	22	46	84	10000	1,9	

SHORTENING CLIP



article number	chain diameter	A	B	C	D ₁	E	F	T	allowed load capacity	weight kg
8	9	40	28	10	57	32	54	2000	0,74	
10	11,5	49	32	12,5	63	37	69	3150	1,1	
13	15	64	42	16	82	48	89	5300	2,4	
16	18	76	52	19	102	59	109	8000	4,35	
18	20	88	58	22	116	68	123	10000	6,05	

STRETCHING SCREW

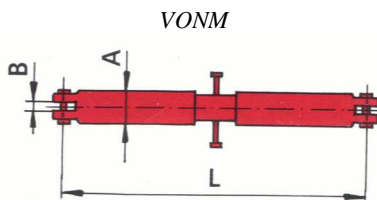

article number	chain diameter	allowed load capacity		A	B	L		weight [kg]
		hanging [kg]	fastening [kg]			min	max	
6	6	1120	2240	25	7	295	415	1,1
8	8	2000	4000	30	9	330	450	2,0
10	10	3150	6300	36	11	450	660	3,9
13	13	5000	10600	42	15	510	730	6,1
16	16	8000	16000	50	18	620	900	9,4
18	18	10000	20000	58	20	820	1250	14,9